

FRONIUS GALVO

/ Not just an inverter, but an energy management system.



/ PC board replacement process



/ SnapINverter Technology



/ HF transformer switchover



/ Integrated data communication



/ Smart Grid Ready


/ With power categories ranging from 1.5 to 3.1 kW, the Fronius Galvo is perfect for households – and is especially suitable for self-consumption systems. The integrated energy management relay allows the self-consumption component to be maximised. A host of other smart features make the Fronius Galvo one of the most future-proof inverters in its class: for example, the integrated datalogging, the simple connection to the internet by WLAN, or the plug-in card technology for retrofitting additional functions.

TECHNICAL DATA FRONIUS GALVO


INPUT DATA	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1	GALVO 3.1-1
DC maximum power at $\cos \varphi = 1$ ¹⁾	1,600 W	2,140 W	2,650 W	3,160 W	3,310 W
Max. input current ($I_{dc,max}$)	13.3 A	17.8 A	16.6 A	19.8 A	20.7 A
Max. array short circuit current	20.0 A	26.8 A	24.8 A	29.6 A	31.0 A
Min. input voltage ($U_{dc,min}$)		120 V		165 V	
Feed-in start voltage ($U_{dc,start}$)		140 V		185 V	
Nominal input voltage ($U_{dc,r}$)		260 V		330 V	
Max. input voltage ($U_{dc,max}$)		420 V		550 V	
MPP voltage range ($U_{mpp,min} - U_{mpp,max}$)		120 - 335 V		165 - 440 V	
Number of MPP trackers			1		
Number of DC connections			3		
OUTPUT DATA	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1	GALVO 3.1-1
AC nominal output ($P_{ac,r}$)	1,500 W	2,000 W	2,500 W	3,000 W	3,100 W
Max. output power	1,500 VA	2,000 VA	2,500 VA	3,000 VA	3,100 VA
Max. output current ($I_{ac,max}$)	7.2 A	9.7 A	12.1 A	14.5 A	15.0 A
Grid connection (voltage range)			1-NPE 230 V (+17 % / -20 %)		
Frequency (frequency range)			50 Hz / 60 Hz (45 - 65 Hz)		
Total harmonic distortion			< 4 %		
Power factor ($\cos \varphi_{ac,r}$)			0.85 - 1 ind. / cap.		
GENERAL DATA	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1	GALVO 3.1-1
Dimensions (height x width x depth)			645 x 431 x 204 mm		
Weight	16.4 kg			16.8 kg	
Degree of protection			IP 65		
Protection class			1		
Overvoltage category (DC / AC) ²⁾			2 / 3		
Night-time consumption			< 1 W		
Inverter concept			HF transformer		
Cooling			Regulated air cooling		
Installation			Indoor and outdoor installation		
Ambient temperature range			-25 - +50 °C		
Permitted humidity			0 to 100 %		
Max. altitude		2,000 m / 3,500 m (unrestricted / restricted voltage range)			
DC connection technology		Screw terminal connection 2.5 mm ² - 16 mm ²			
AC connection technology		Screw terminal connection 2.5 mm ² - 16 mm ²			
Certificates and compliance with standards	AS 4777-2&3, AS3100, IEC 62109-1&2, IEC 61727, IEC 62116, G83, G59, DIN V VDE 0126-1-1/A1, VDE AR N 4105, CER 06-190, CEI 0-21, EN 50438, ÖVE / ÖNORM E 8001-4-712				

¹⁾ Maximum power inverter can convert ²⁾ Testing to IEC 62109-1.

FRONIUS GALVO 3.1-1 EFFICIENCY CURVE

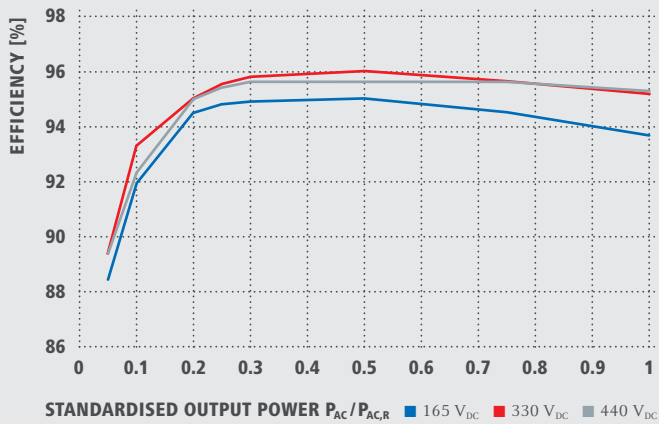

FRONIUS GALVO 3.1-1 TEMPERATURE DERATING

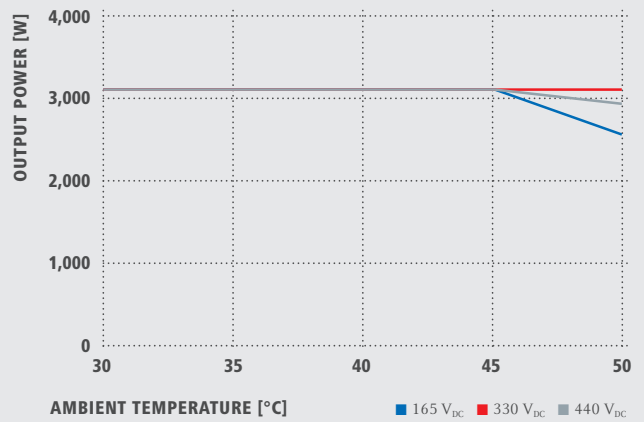

TECHNICAL DATA FRONIUS GALVO

EFFICIENCY	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1	GALVO 3.1-1
Max. efficiency	95.9 %	96.0 %		96.1 %	
European efficiency (η_{EU})	94.5 %	94.9 %	95.2 %	95.4 %	95.4 %
η at 5 % $P_{AC,r}$ ¹⁾	84.5 / 86.0 / 86.0 %	84.2 / 86.1 / 85.9 %	88.6 / 89.6 / 89.4 %	88.2 / 89.2 / 89.1 %	88.4 / 89.4 / 89.4 %
η at 10 % $P_{AC,r}$ ¹⁾	87.5 / 89.7 / 89.6 %	89.6 / 91.4 / 91.3 %	91.2 / 92.3 / 91.4 %	91.8 / 93.1 / 92.1 %	91.9 / 93.3 / 92.3 %
η at 20 % $P_{AC,r}$ ¹⁾	91.3 / 93.3 / 93.1 %	92.6 / 94.3 / 93.9 %	94.0 / 94.8 / 94.5 %	94.4 / 95.0 / 94.9 %	94.5 / 95.0 / 95.0 %
η at 25 % $P_{AC,r}$ ¹⁾	92.4 / 94.1 / 93.9 %	93.3 / 94.9 / 94.5 %	94.5 / 95.1 / 95.0 %	94.8 / 95.5 / 95.3 %	94.8 / 95.5 / 95.4 %
η at 30 % $P_{AC,r}$ ¹⁾	93.0 / 94.6 / 94.3 %	93.6 / 95.2 / 94.9 %	94.8 / 95.5 / 95.3 %	94.8 / 95.7 / 95.6 %	94.9 / 95.8 / 95.6 %
η at 50 % $P_{AC,r}$ ¹⁾	93.9 / 95.5 / 95.2 %	94.3 / 95.8 / 95.2 %	95.0 / 95.7 / 95.2 %	95.0 / 96.0 / 95.5 %	95.0 / 96.1 / 95.6 %
η at 75 % $P_{AC,r}$ ¹⁾	94.2 / 95.6 / 95.4 %	94.0 / 95.9 / 95.6 %	94.8 / 95.9 / 95.6 %	94.6 / 95.8 / 95.6 %	94.5 / 95.6 / 95.6 %
η at 100 % $P_{AC,r}$ ¹⁾	94.0 / 95.9 / 95.6 %	93.5 / 95.6 / 95.5 %	94.4 / 95.7 / 95.5 %	93.9 / 95.4 / 95.3 %	93.7 / 95.2 / 95.3 %
MPP adaptation efficiency			> 99.9 %		

PROTECTION DEVICES	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1	GALVO 3.1-1
DC insulation measurement		Warning/shutdown (depending on country setup) at $R_{ISO} < 600 \text{ k}\Omega$			
Overload behavior		Operating point shift, power limitation			
DC disconnecter		Included			

INTERFACES	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1	GALVO 3.1-1
WLAN / Ethernet LAN		Fronius Solar.web, Modbus TCP SunSpec, Fronius Solar API (JSON)			
6 inputs and 4 digital inputs/outputs		Interface to ripple control receiver			
USB (A socket) ²⁾		Datalogging, inverter update via USB flash drive			
2x RS422 (RJ45 socket) ²⁾		Fronius Solar Net, interface protocol			
Signalling output ²⁾		Energy management (floating relay output)			
Datalogger and Webserver		Included			
RS485 ³⁾		Modbus RTU SunSpec or meter connection			

¹⁾ And at $U_{mpp \text{ min}} / U_{dc,r} / U_{mpp \text{ max}}$. ²⁾ Also available in the light version. ³⁾ Available 2015

/ Perfect Welding / Solar Energy / Perfect Charging

WE HAVE THREE DIVISIONS AND ONE PASSION: SHIFTING THE LIMITS OF POSSIBILITY.

/ Whether welding technology, photovoltaics or battery charging technology – our goal is clearly defined: to be the innovation leader. With around 3,000 employees worldwide, we shift the limits of what's possible - our more than 850 active patents are testimony to this. While others progress step by step, we innovate in leaps and bounds. Just as we've always done. The responsible use of our resources forms the basis of our corporate policy.

Further information about all Fronius products and our global sales partners and representatives can be found at www.fronius.com



v02 Feb 2014 EN

Fronius Australia Pty Ltd.
90-92 Lambeck Drive
Tullamarine VIC 3043
Australia
pv-sales-australia@fronius.com
www.fronius.com.au

Fronius International GmbH
Froniusplatz 1
4600 Wels
Austria
pv@fronius.com
www.fronius.com

Text and images correspond to the current state of technology at the time of printing. Subject to modifications. All information is without guarantee in spite of careful editing. Liability excluded. Copyright © 2011 Fronius™. All rights reserved.

M.06.00.91, EN v06 Aug 2014